


## BETAflam 145 C-flex, black 6 x 2 x 0.75 mm<sup>2</sup> NR

Item-no.: 306274

### Construction

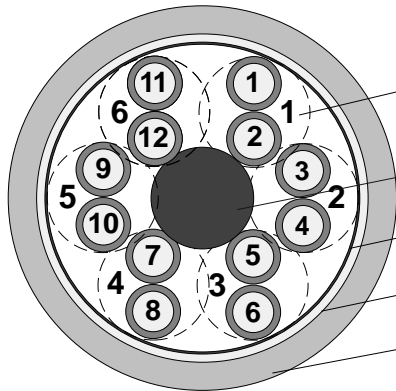

6 x 2 x BETAtherm 145 core 0.75 mm<sup>2</sup>

Conductor: tinned fine copper strands acc. to IEC 60228, class 5  
Insulation: polyolefin copolymer, electron-beam cross-linked HF90  
Core colours: black, No. 1-12 white

Filler elements

Syntetic tape

Shielding: tinned fine copper braid, optical coverage min. 85%

Sheath: polyolefin copolymer, black, electron-beam cross-linked SHF2

### Dimensions (approx.)

Ø BETAtherm 145 core	2.20 mm
Ø over core stranding	11.30 mm
Ø over shielding (copper braid)	11.70 mm
Ø cable	13.80 mm

### Technical data

Nominal voltage	Uo/U	300/500 V
Testing voltage	core / core	2000 V
	core / shielding	1500 V
Max. conductor temperature	fixed installation	+145 °C
	occasionally moved	+120 °C
Min. ambient temperature	fixed installation	- 55 °C
	occasionally moved	- 35 °C
Min. bending radius	fixed installation	> 6 x cable-Ø
	occasionally moved	> 12 x cable-Ø
Cable weight		~ 249 kg/km

### Fire performance and material properties

Halogen free	IEC 60754-1, EN 50267-2-1
No corrosive gases	IEC 60754-2, EN 50267-2-2
No toxic gases	NES 02-713, NF X 70-100
Low smoke density	IEC 61034, EN 50268-2
Flame retardant	IEC 60332-1, EN 50265-2-1
Non-flame propagating	IEC 60332-3, EN 50266-2, NF C 32-070
Low fire load	DIN 51900
Cross-linked insulation compound HF90	IEC 60092-360
Cross-linked sheathing compound SHF2	IEC 60092-360

Specifications subject to change without notice

## BETAflam 145 C-flex, black 6 x 2 x 0.75 mm<sup>2</sup> NR

Item-no.: 306274

### Standards

---

IEC 60092-376

IEC 60092-353

### Approvals

---



LEONI

Specifications subject to change without notice

Seite 2 / 2

27.11.19 / sama

**LEONI Studer AG** Herrenmattstrasse 20 Telefon +41 (0)62 288 82 82  
Postfach 63 Fax +41 (0)62 288 83 83  
CH-4658 Däniken E-Mail mailbox@leoni-studer.ch  
Schweiz www.leoni-studer.ch