


BETAflam 145 C-flex VM, black

4G10 mm², gnye, bk, bn, gy

Item no.: 309240

Construction

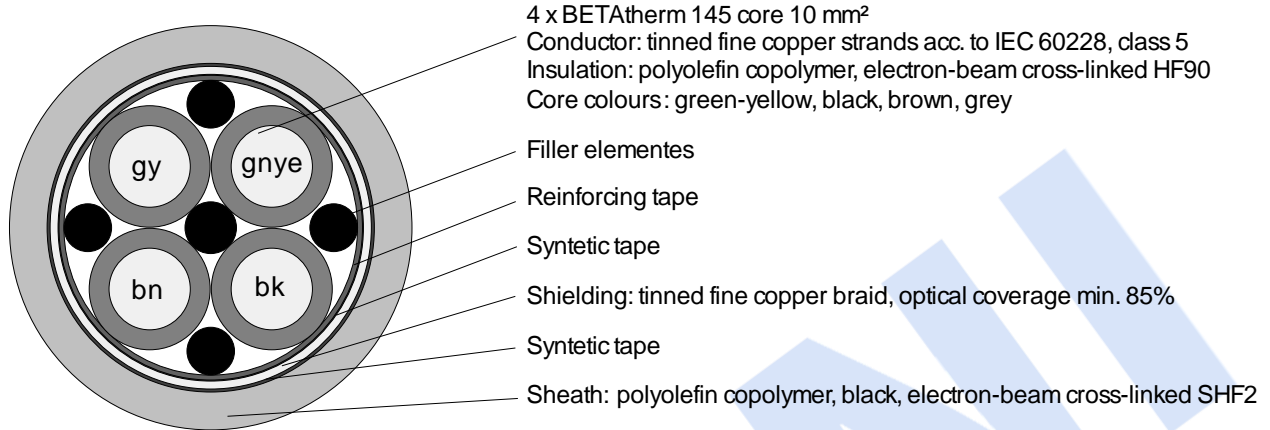

Dimensions (approx.)

Ø BETAtherm 145 core	6.10 mm
Ø over core stranding	14.80 mm
Ø over shielding (copper braid)	15.90 mm
Ø cable	20.60 mm

Technical data

Nominal voltage	Uo/U	600/1000 V
Testing voltage	core / core	3500 V
	core / shielding	2500 V
Max. conductor temperature	fixed installation	+ 145 °C
	occasionally moved	+ 120 °C
Min. ambient temperature	fixed installation	- 55 °C
	occasionally moved	- 35 °C
Min. bending radius	fixed installation	> 6 x cable-Ø
	occasionally moved	> 12 x cable-Ø
Cable weight		~ 744 kg/km

Fire performance and material properties

Halogen free	IEC 60754-1, EN 50267-2-1
No corrosive gases	IEC 60754-2, EN 50267-2-2
No toxic gases	NES 02-713, NF X 70-100
Low smoke density	IEC 61034, EN 50268-2
Flame retardant	IEC 60332-1, EN 50265-2-1
Non-flame propagating	IEC 60332-3, EN 50266-2, NF C 32-070
Low fire load	DIN 51900
Cross-linked insulation compound HF90	IEC 60092-360
Cross-linked sheathing compound SHF2	IEC 60092-360

Specifications subject to change without notice

5 11 1 1 1

BETAflam 145 C-flex VM, black
4G10 mm², gnye, bk, bn, gy
Item no.: 309240

Standards

IEC 60092-353

Approvals



LEONNI

Specifications subject to change without notice

5 11 2 1 2

Calpe Marine
Anthonie Fokkerstraat 53
3772 MP Barneveld
The Netherlands

+ 31 (0)342 - 45 15 44
info@calpe.nl
www.calpe-marine.com