


BETAflam 145 C-flex bk

1 x 50 mm² L

Item no.: 309241

Construction

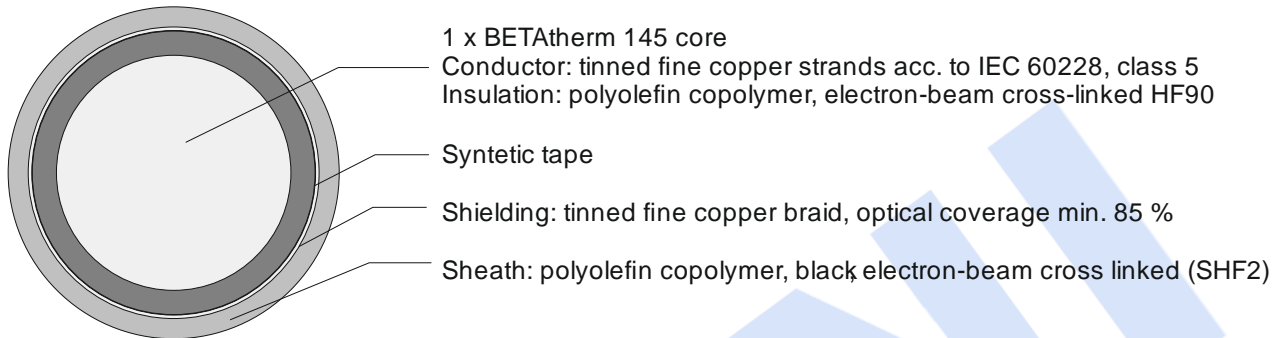

Dimensions (approx.)

Ø BETAtherm 145 core 50 mm ²	12.50 mm
Ø over shielding	13.00 mm
Ø cable	15.30 mm

Technical data

Nominal voltage	U ₀ /U fixed and protected installation	450/750 V 600/1000 V
Testing voltage	core / core core / shielding	3500 V 2500 V
Max. conductor temperature	fixed installation occasionally moved	+145 °C +120 °C
Min. ambient temperature	fixed installation occasionally moved	- 55 °C - 35 °C
Min. bending radius	fixed installation occasionally moved	> 6 x cable-Ø > 12 x cable-Ø
Cable weight		~ 623 kg/km

Fire performance and material properties

Halogen free	IEC 60754-1, EN 50267-2-1
No corrosive gases	IEC 60754-2, EN 50267-2-2
No toxic gases	NES 02-713, NF X 70-100
Low smoke density	IEC 61034, EN 50268-2
Flame retardant	IEC 60332-1, EN 50265-2-1
Non-flame propagating	IEC 60332-3, EN 50266-2, NF C 32-070
Low fire load	DIN 51900
Cross-linked insulation compound HF90	IEC 60092-360
Cross-linked sheathing compound SHF2	IEC 60092-360

Specifications subject to change without notice

BETAflam 145 C-flex bk

1 x 50 mm² L

Item no.: 309241

Standards

IEC 60092-376

IEC 60092-353

Approvals



Specifications subject to change without notice

Seite 2 / 2

I FONI Studer AG Herrenmattstrasse 20 Telefon +41 (0)62 288 82 82

Calpe Marine
Anthonie Fokkerstraat 53
3772 MP Barneveld
The Netherlands

+ 31 (0)342 - 45 15 44
info@calpe.nl
www.calpe-marine.com

CALPE-MARINE.COM